

Bundesministerium der Verteidigung
Fü S IV 2 - Az 03-51-60

53003 Bonn 22.02.1996
Postfach 1328
AllgFspWNBw 34 00 - 98 54
Tel.: (0228) 12-9854

Deutscher Militärischer Vertreter
im MC/NATO
Bld. Léopold III

B -1110 Brüssel/Belgien

BMVg - Fü H V 1
- Fü L V 1
- Fü M II 2
- InSan II 1
- Rü IV 1
- VR II 4

Im Ministerium

nachrichtlich
Bundesamt für Wehrtechnik
und Beschaffung
- AT III 4 -

56057 Koblenz

Betr.: Militärische Standardisierung im Rahmen der NATO;
hier: Inkraftsetzung STANAG 2835 LAND (2. Ausgabe)

2835

Bezug: 1. Richtlinien STANAG-Bearbeitung vom 09. Juli 1979
2. MAS/290-LAND/2835 vom 22. September 1995
3. BMVg - Fü S IV 2 - Az 03-51-60 vom 06. März 1990

1. Die Bundesrepublik Deutschland hat dem NATO-Standardisierungsübereinkommen
STANAG 2835 LAND (2. Ausgabe - 1. Entwurf) mit Schreiben BMVg - Fü S IV 2 - Az 03-51-60 vom
06. März 1990 für die Bundeswehr zugestimmt.

2. Gemäß Bezug 1) Abs 5.1.1 a wird das **STANAG 2835 LAND (2. Ausgabe)**

**"NATO ULTRAVIOLET REFLECTIVE (UVR) WHITE COLOUR FOR THE CAMOUFLAGE OF
MILITARY EQUIPMENTS IN SNOW ENVIRONMENTS"**

rückwirkend zum 02. Januar 1996 für die **Bundeswehr** in Kraft gesetzt.

3. Die Einzelbestimmungen des STANAG sind für die **Bundeswehr** von diesem Zeitpunkt ab
verbindlich.

Nationales INKRAFTSETZUNGS-DOKUMENT ist dieser Erlass.
Durchführungsdokument (NATIONAL IMPLEMENTING DOCUMENT):
Das STANAG wird im Original angewendet.

Für die Maßnahmen zur Durchführung gem. Bezug 1) Abschn. 5.5 und 5.6 ist das Bundesamt für
Wehrtechnik und Beschaffung federführend.

4. **Freigabe an PfP-Staaten: ja**
Freigabe an Nicht-NATO-Staaten: ja

Im Auftrag



Conrad

NATO UNCLASSIFIED
NORTH ATLANTIC TREATY ORGANIZATION
ORGANISATION DU TRAITE DE L'ATLANTIQUE NORD

MILITARY AGENCY FOR STANDARDIZATION (MAS)
BUREAU MILITAIRE DE STANDARDISATION (BMS)
1110 BRUSSELS

Tel : 728.55.76
Fax : 728.57.18

MAS/290-LAND/2835
22 September 1995

To : See MAS Distribution List No. 2

Subject : STANAG 2835 LAND (EDITION 2) - NATO ULTRAVIOLET REFLECTIVE (UVR) WHITE COLOUR FOR THE CAMOUFLAGE OF MILITARY EQUIPMENTS IN SNOW ENVIRONMENTS


References : a. MAS(ARMY)(75)475 dated 8 December 1975
b. AC/225-D/1090 / AC/225(Panel VI)D/383 dated 4 September 1989

Enclosure : STANAG 2835 (Edition 2)

1. The enclosed NATO Standardization Agreement which has been ratified by nations as reflected in page iii is promulgated herewith.
2. The references listed above are to be destroyed in accordance with local document destruction procedures.
3. AAP-4 should be amended to reflect the latest status of the STANAG.

ACTION BY NATIONAL STAFFS

4. National staffs are requested to examine page iii of the STANAG and if they have not already done so, to advise the Defence Support Division, IS, through their national delegation as appropriate of their intention regarding its ratification and implementation.


G.B. FERRARI
Major-General, ITAF
Chairman, MAS

NORTH ATLANTIC TREATY ORGANIZATION
(NATO)



MILITARY AGENCY FOR STANDARDIZATION
(MAS)

STANDARDIZATION AGREEMENT

SUBJECT: NATO ULTRAVIOLET REFLECTIVE (UVR) WHITE COLOUR FOR THE
CAMOUFLAGE OF MILITARY EQUIPMENTS IN SNOW ENVIRONMENTS

Promulgated on 22 September 1995

A handwritten signature in black ink, appearing to read 'G. B. Ferrari', written over the typed name and title.

G. B. FERRARI
Major-General, ITAF
Chairman, MAS

RECORD OF AMENDMENTS

No.	Reference/date of amendment	Date entered	Signature

EXPLANATORY NOTES

AGREEMENT

1. This NATO Standardization Agreement (STANAG) is promulgated by the Chairman MAS under the authority vested in him by the NATO Military Committee.
2. No departure may be made from the agreement without consultation with the tasking authority. Nations may propose changes at any time to the tasking authority where they will be processed in the same manner as the original agreement.
3. Ratifying nations have agreed that national orders, manuals and instructions implementing this STANAG will include a reference to the STANAG number for purposes of identification.

DEFINITIONS

4. Ratification is "The declaration by which a nation formally accepts the content of this Standardization Agreement".
5. Implementation is "The fulfilment by a nation of its obligations under this Standardization Agreement".
6. Reservation is "The stated qualification by a nation which describes that part of this Standardization Agreement which it cannot implement or can implement only with limitations".

RATIFICATION, IMPLEMENTATION AND RESERVATIONS

7. Page iii gives the details of ratification and implementation of this agreement. If no details are shown it signifies that the nation has not yet notified the tasking authority of its intentions. Page iv (and subsequent) gives details of reservations and proprietary rights that have been stated.

ARMY

NATO STANDARDIZATION AGREEMENT
(STANAG)

NATO ULTRAVIOLET REFLECTIVE (UVR) WHITE COLOUR
FOR THE CAMOUFLAGE OF MILITARY EQUIPMENTS
IN SNOW ENVIRONMENTS

- Annex A. Standard specifications for NATO UVR white colour
Appendix A 1. Reference curve and limit curves
Colorimetric tolerances and characteristics
- Annex B. Standard methods of inspection for NATO UVR white colour

Reference documents :

- STANAG 2338 LAND - NATO infrared reflective (IRR) green colour
for painting military equipment
- STANAG 2836 LAND - Removable paints for camouflage

AIM

- 1 . The aim of this agreement is to standardize, for NATO Forces, the characteristics of a white colour reflecting in particular ultraviolet radiation (UV), to be known as NATO UVR white.

This colour will provide camouflage in the spectral regions extending from the near ultraviolet to near infrared and blend with the snow of the European theatre of operations.

AGREEMENT

- 2 . Participating nations agree to define the characteristics of a common camouflage colour called NATO UVR white and to use it for the camouflage of military equipment intended for use in snow environments.

STANAG 2835
(Edition 2)

GENERAL

- 3 . The present agreement is in two parts :
 - a . Annex A, which gives the reference reflectance curve, nominal colorimetric characteristics and specular gloss of the NATO UVR white colour, as well as corresponding tolerances,
 - b . Annex B, which describes the standard methods of inspection for the aforementioned colour.
- 4 . A nation may use NATO UVR white colour when this colour is appropriate :
 - a . either for equipment in general,
 - b . or for military equipment manufactured in common by two or more signatory nations.
- 5 . Any signatory nation may use the NATO UVR white colour, notably for the following products and materials :
 - . removable paints (temporary),
 - . finishing paints (permanent),
 - . coated fabrics (tarpaulins. etc.),
 - . camouflage nets or screens,
 - . textiles,
 - . miscellaneous coatings and materials.
- 6 . Nations concerned, when arranging an international contract, will determine the specular gloss of any equipment requiring a camouflage white colour as well as the corresponding tolerances.
- 7 . However, as regards § 4.b, equipment received or manufactured before the date of implementation of the agreement by concerned nations does not have to be of the NATO UVR white colour.

IMPLEMENTATION OF THE AGREEMENT

- 8 . This STANAG shall be deemed to have been implemented when a nation has given instructions to its Forces to the effect that the colour of equipment used in snow environments must be in accordance with this STANAG.

STANDARD SPECIFICATIONS FOR NATO UVR WHITE COLOURINTRODUCTION

- 1 . The following optical characteristics apply to opaque ⁽¹⁾ samples, as delivered, after any conditioning appropriate to the nature of the material.

So as to ensure the durability of the optical characteristics mentioned below under conditions of normal use of equipment and materials it is recommended that indicative measurements are made on samples before and after ageing(s) ⁽²⁾.

Ageing test conditions (*including sample conditioning after test*) and optical tolerances associated with this test are to be defined by each nation depending on the nature of the product or material and its use.

REFLECTANCE CURVE

- 2 . The reflectance curve of equipment (*or material*) from 350 to 1 200 nanometres must lie within the tolerance zone between the upper and lower limit curves and be as close as possible to the reference curve (see reference curve and limit curves, Appendix A 1 to this annex).

However, it is desirable that this condition be also met in the spectral range from 320 to 350 nanometres (see dashed curves in Appendix A 1 to this annex).

(1) In the case of non-opaque - but not translucent material - a complex test sample made of sufficient layers of material to make it opaque over the whole spectral range, must be prepared

(2) Natural ageing (*exposure to the elements*), artificial ageing (*artificial radiation*), various types of cleaning, washing sequences, etc.

ANNEX A to
STANAG 2835
(Edition 2)

COLORIMETRIC CHARACTERISTICS (x,y et Y ; a*,b* et L*)

3 . The nominal colorimetric characteristics are as follows :

- illuminant D_{65} / CIE 1964 (10°) supplementary standard colorimetric observer

. chromaticity ⁽¹⁾	. chromaticity ⁽¹⁾
$x_0 = .315$	$a_0^* = .14$
$y_0 = .332$	$b_0^* = .74$
. luminance factor ⁽¹⁾	. CIE 1976 lightness ⁽¹⁾
$Y_0 = 87.4 \%$	$L_0^* = 94.9$

- illuminant C / CIE 1931 (2°) standard colorimetric observer

. chromaticity ⁽¹⁾	. chromaticity ⁽¹⁾
$x_0 = .312$	$a_0^* = .04$
$y_0 = .318$	$b_0^* = .80$
. luminance factor ⁽¹⁾	. CIE 1976 lightness ⁽¹⁾
$Y_0 = 87.4 \%$	$L_0^* = 94.9$

Note : The NATO UVR white colour must be **non-fluorescent**

4 . The maximum acceptable tolerance ⁽¹⁾ (ΔE_{max}) is as follows :

$$\Delta E_{max} = 4 \text{ CIELAB units}$$

5 . So as to avoid any dispute arising from dispersion in measurements obtained with the different apparatus used by the parties concerned, it is recommended that in the case of bilateral or multilateral programmes, a smaller tolerance (ΔE) than those indicated in § 4, namely :

$$\Delta E = 2 \text{ CIELAB units}$$

be imposed on manufacturers.


In addition to the above colorimetric tolerance ΔE , concerned parties may if necessary impose other colorimetric tolerances, also expressed in CIELAB units, emphasizing chromaticity (ΔC) and CIE 1976 lightness (ΔL^*) differences. It will be remembered that $\Delta E = (\Delta C^2 + \Delta L^{*2})^{1/2}$.

(1) See CIE Publication N° 15.2 (1986) - "Colorimetry - Second edition - Technical Committee Reports of the International Commission on Illumination"

SPECULAR GLOSS (SPECULAR REFLECTION)

- 6 . The NATO UVR white colour must have the following degree of gloss (G_s), before correction for the contribution of the diffuse light :
- a . in the case of **painted surfaces**, measured in accordance with ISO standard 2813 :
 $G_s \leq 8$ gloss units for 60° geometry ;
 - b . in the case of **coated fabrics** (tarpaulins, etc.) and **camouflage nets**, measured in accordance with ISO standard 2813 :
 $G_s \leq 8$ gloss units for 60° geometry ;
 - c . in the case of **camouflage screens** :
 $G_s \leq 8$ gloss units for 60° geometry ;
 - d . in the case of **other products, coatings and materials** :
to be defined.
- 7 . In the case of bilateral or multilateral programmes, the concerned parties must specify the specular gloss of any equipment and also the corresponding tolerances (see General § 6) ; geometry will have to be specified, if different from that of § 6.

NATO UVR WHITE COLOUR - REFERENCE CURVE AND LIMIT CURVES/COLORIMETRIC TOLERANCES AND CHARACTERISTICS
COULEUR BLANC UV OTAN - COURBE DE REFERENCE ET COURBES LIMITES/CARACTERISTIQUES ET TOLERANCES COLORIMETRIQUES

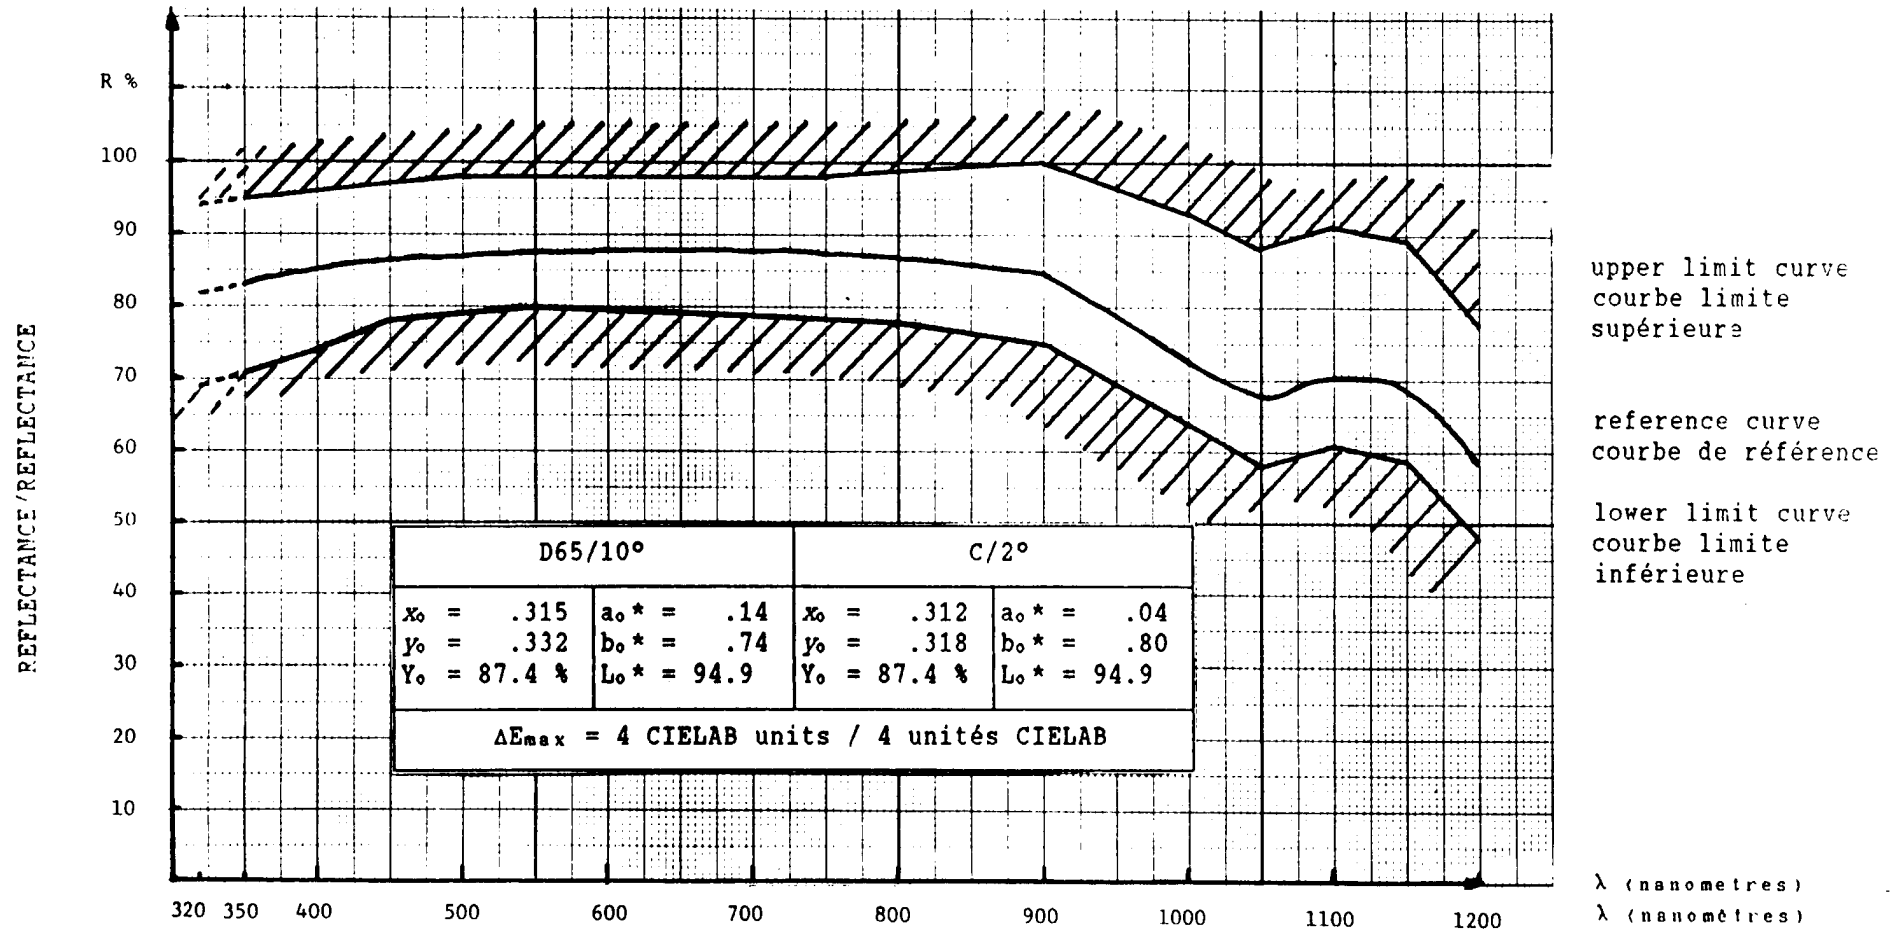

STANDARD METHODS OF INSPECTION FOR
NATO UVR WHITE COLOUR

REFLECTANCE CURVE

1 . Draw up the curve using a spectrophotometer fitted with an integrating sphere and under the following operating conditions :

- measurement geometry

<i>normal/diffuse (ϵ°/d)</i> or <i>diffuse/normal (d/ϵ°)</i>	with $\epsilon^\circ \leq 8^\circ$ <i>specular component</i> <i>excluded</i>
--	--
- reference standard : *barium sulphate or calibrated official white standard*
- spectral range : *320 to 1 200 nanometres*

COLORIMETRIC CHARACTERISTICS (x, y et Y ; a^* , b^* et L^*)

2 . Effect measurements using a spectrophotometer fitted with an integrating sphere and under the following operating conditions :

- measurement geometry

<i>normal/diffuse (ϵ°/d)</i> or <i>diffuse/normal (d/ϵ°)</i>	with $\epsilon^\circ \leq 8^\circ$ <i>specular component</i> <i>excluded</i>
--	--
- reference standard : *barium sulphate or calibrated official white standard*
- spectral range : *380 to 780 nanometres*

3 . Effect colorimetric calculations by selecting

- illuminant D_{65} or C
- CIE 1964 (10°) supplementary standard colorimetric observer or CIE 1931 (2°) standard colorimetric observer
- measuring wavelength interval ($\Delta\lambda$) : *10 nanometres*

SPECULAR GLOSS (SPECULAR REFLECTION)

4 . Measure the degree of gloss by means of a glossmeter under the following operating conditions :

- measurement geometry : 60°
- reference standard : *black Carrara glass or calibrated official black standard*

5 . Correct for the contribution of the diffuse light, if such correction has been decided upon.

N A T O U N C L A S S I F I E D

(iii)

STANAG 2835
(Edition 2)

RATIFICATION AND IMPLEMENTATION DETAIL
STADE DE RATIFICATION ET DE MISE EN APPLICATION

Nation	National Ratification Reference de la ratification nationale	National Implementing Document national de mise en application	Implementation/Mise en application					
			Forecast Date prévue			Actual Date Date réelle		
			NAVY MER	ARMY TERRE	AIR	NAVY MER	ARMY TERRE	AIR
BE	GSA 1388 of/du 21.03.90		-	3.96	-			
CA *	2441-2875 (DCGEM 4-2-3) of/du 01.02.90	NDHQ INSTRUCTION DCDS 83 CCD(non- Electronic)						2.90
DA *	M.204.69-S 2835/MLA-04276 of/du 26.02.90		not implementing					
FR								
GE	BMVg Fue S IV 1 Az 03-51-60/2835 of/du 06.03.90			1.96				
GR								
IT								
LU								
NL								
NO *	MAS-103/93/1201/HST/U- 3/BO/KHS/STANAG 2835 of/du 01.02.93	STANAG 2835						1.94
PO								
SP								
TU								
UK	D/DSTAN/341/8/2835 of/du 04.04.91							12.95
US	AMCICP-ISI-T(34-1d) of/du 04.08.93					9.95	9.95	9.95

* See overleaf reservations/Voir réserve au verso

(iii)

O T A N S A N S C L A S S I F I C A T I O N

STANAG 2835
(Edition 2)

(iv)

RESERVATIONS

CA = Canada will not retrofit present equipment but will incorporate STANAG in future acquisitions.

DA = a) The present limit in the spectral region from 350 to 1200 nanometres to be changed to 320 to 1200 nanometres.

b) Appendix to ANNEX A:

- that the stated reference curve is in accordance with the nominal colorimetric characteristics.
- the upper limit curve to be changed to a horizontal line at R=100% in the whole spectral region from 320 to 1200 nanometres.

NO = First Section of para 5. ANNEX A.

(iv)